


## EASY 2200

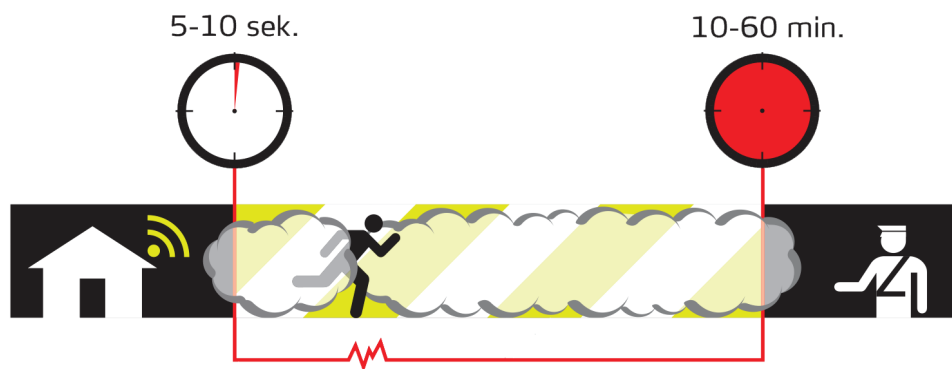

The **EASY 2200** is a very high power fog system with a high level of configuration available to suit any installation.

With its patented instant heat transfer technology the fog output is very powerful filling large areas in seconds.

The system is commonly used in very high value areas or larger more open areas. It is often used to protect against daytime armed robbery attacks.



## Product features

- Very high output of dense white fog for maximum protection
- Harmless dry vapour with no negative side effects
- The fog hangs up to an hour
- Fluid refill system
- Danish design
- Battery back-up
- Heavy duty sabotage resistant case
- Internal system status LED indicators
- Built-in self diagnostics
- Electronic fluid measurement system
- Output signals for communication with existent alarm system
- Input signals for controlling the SmokeCloak from existing alarm system
- USB interface for upload / download of information and log-files
- Patented automatic smoke density maintenance
- Power saving mode
- Air flush system
- Audible tone status signal Installation
- Installation, service and maintenance friendly
- Horizontal, vertical and ceiling mounting option
- Seamless integration with all existing alarm systems

## EASY 2200

### Physical

Dimensions	468 x 382 x 223 mm
Installation Weight	19.15 kg
Colour	White RAL 9016
Fluid	1 litre fluid refill system
Required electricity supply	200-250V
Power consumption	1900watt @ 230 Volt
Average power consumption	107W full temp / 72W power save
Reaction time	0,1 seconds
Output	Output 30 sec.: 1529 m <sup>3</sup> (764*) 60 sec.: 2011 m <sup>3</sup> (1005*)
Pulse Function	Programmable via PC Tool
Heat up time	(ready) 9 min
Tested and approved in accordance with EN 50131-8	Yes
Number of output nozzles	2 (straight or 30 degree)



SmokeCloak DNA



Non Toxic on human, animals, food and It.



EN 50131-8 European standard

